



# Building Standards

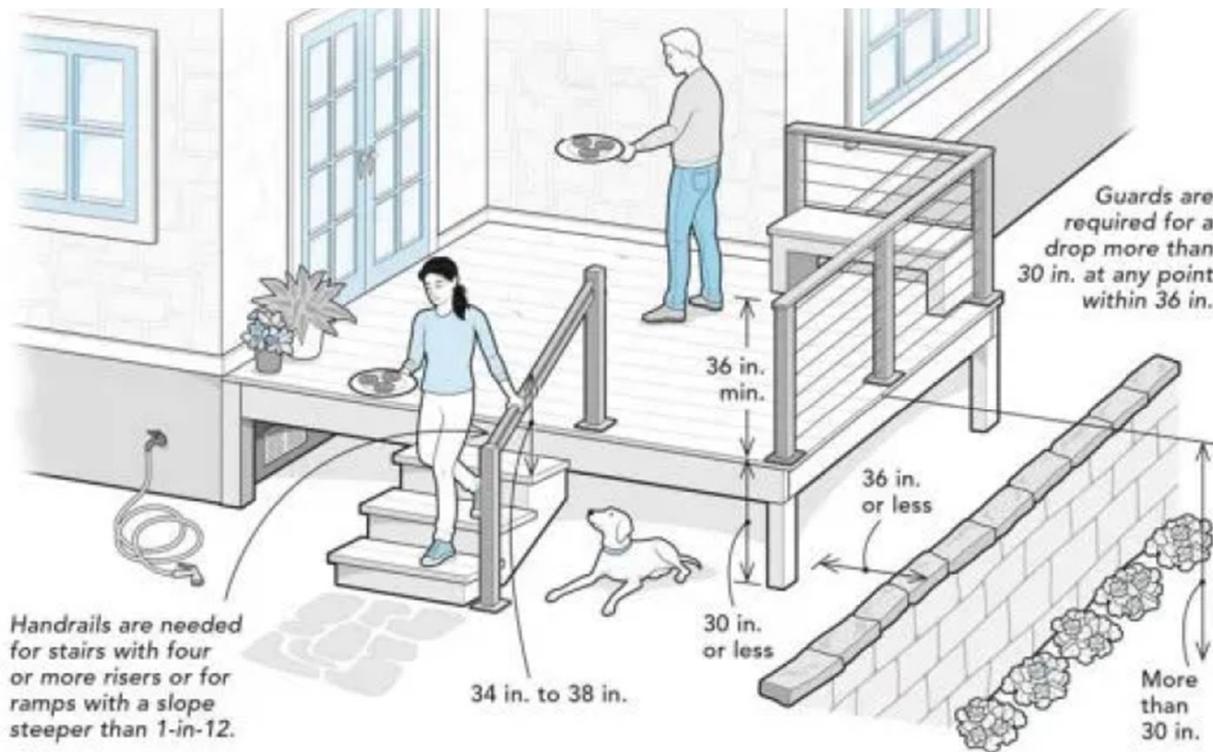


# Building Standards

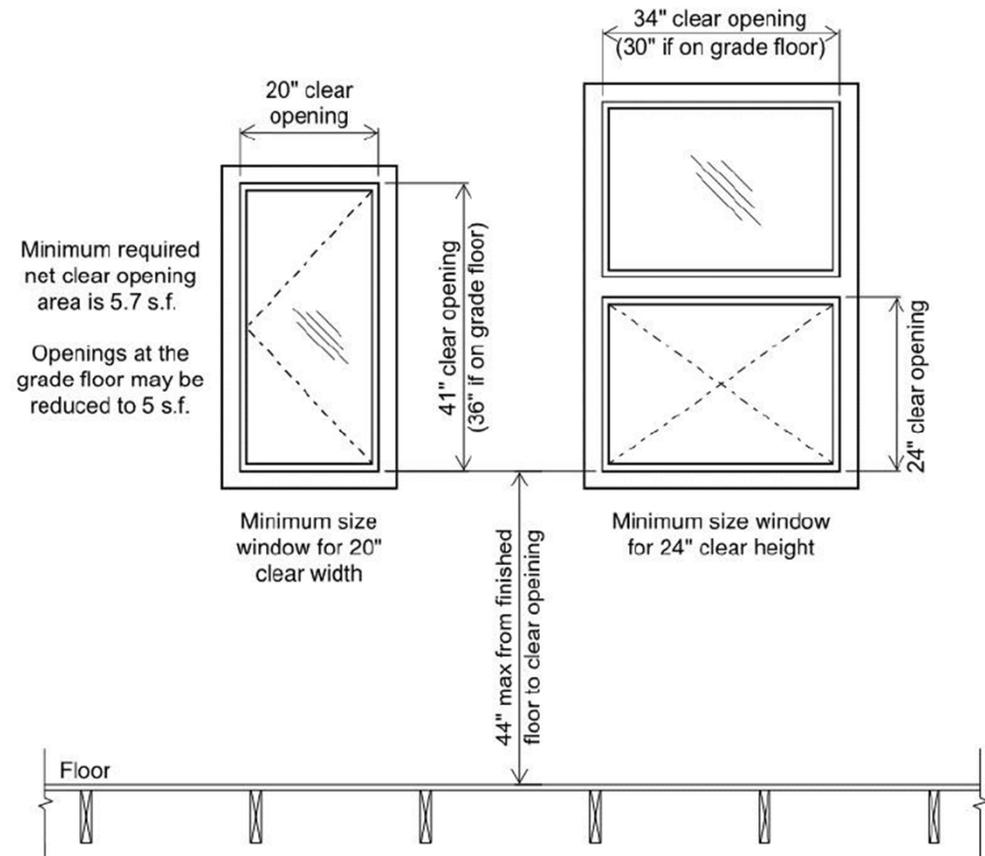


Basements, habitable attics and every sleeping room shall have not less than one operable emergency escape and rescue opening. Where basements contain one or more sleeping rooms, an emergency escape and rescue opening shall be required in each sleeping room. Emergency escape and rescue openings shall open directly into a public way, or to a yard or court that opens to a public way.


# Building Standards

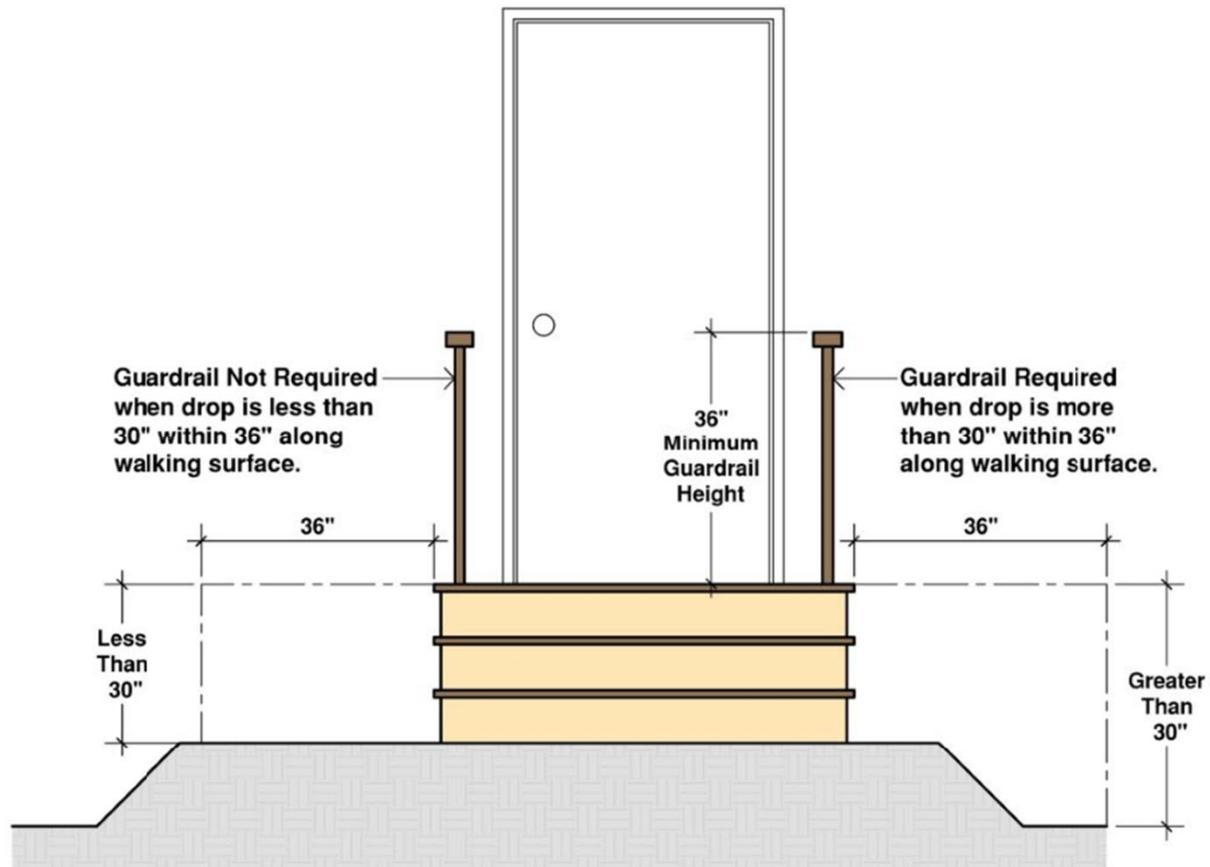


# Building Standards

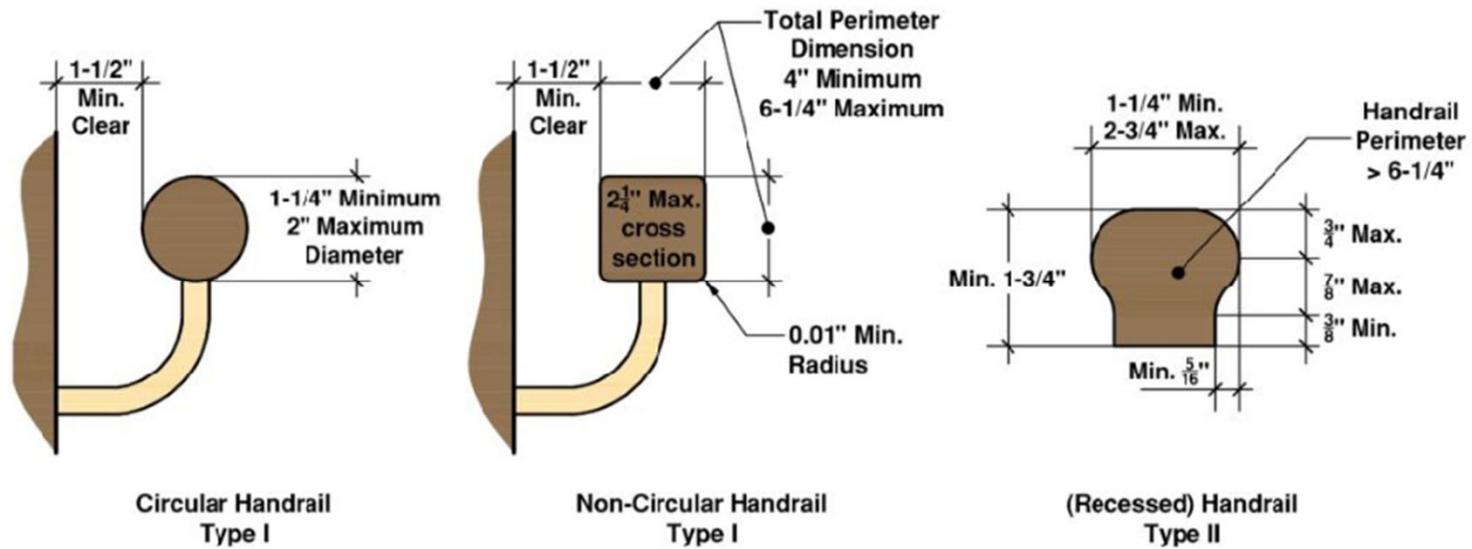

# Building Standards

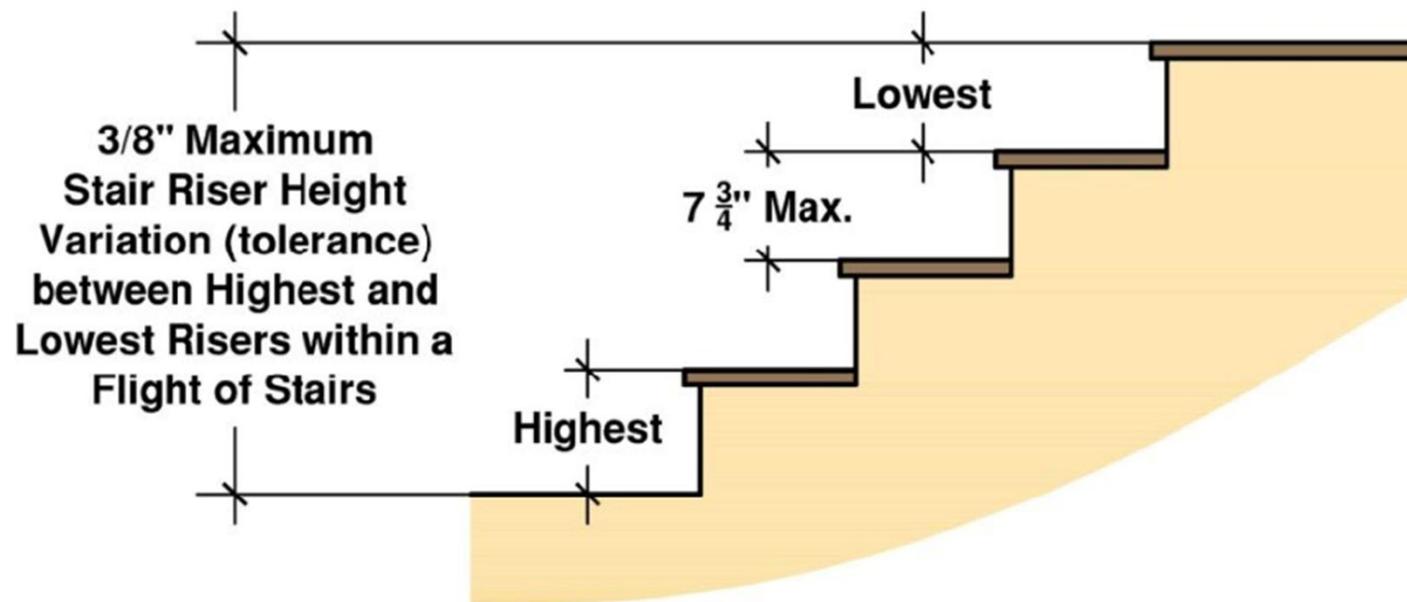


# Building Standards

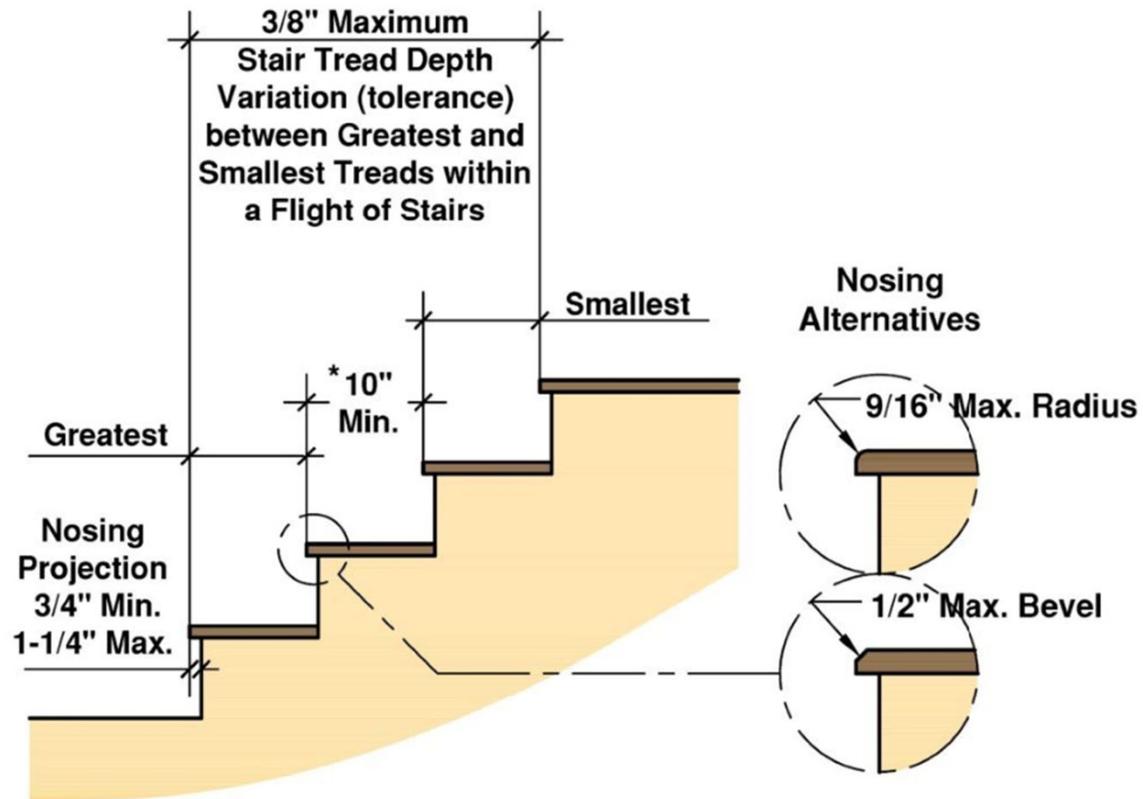


\* Nosing is required where tread depth is minimum 10".  
Exception: Nosing not required if tread depth is 11" minimum.

# Building Standards

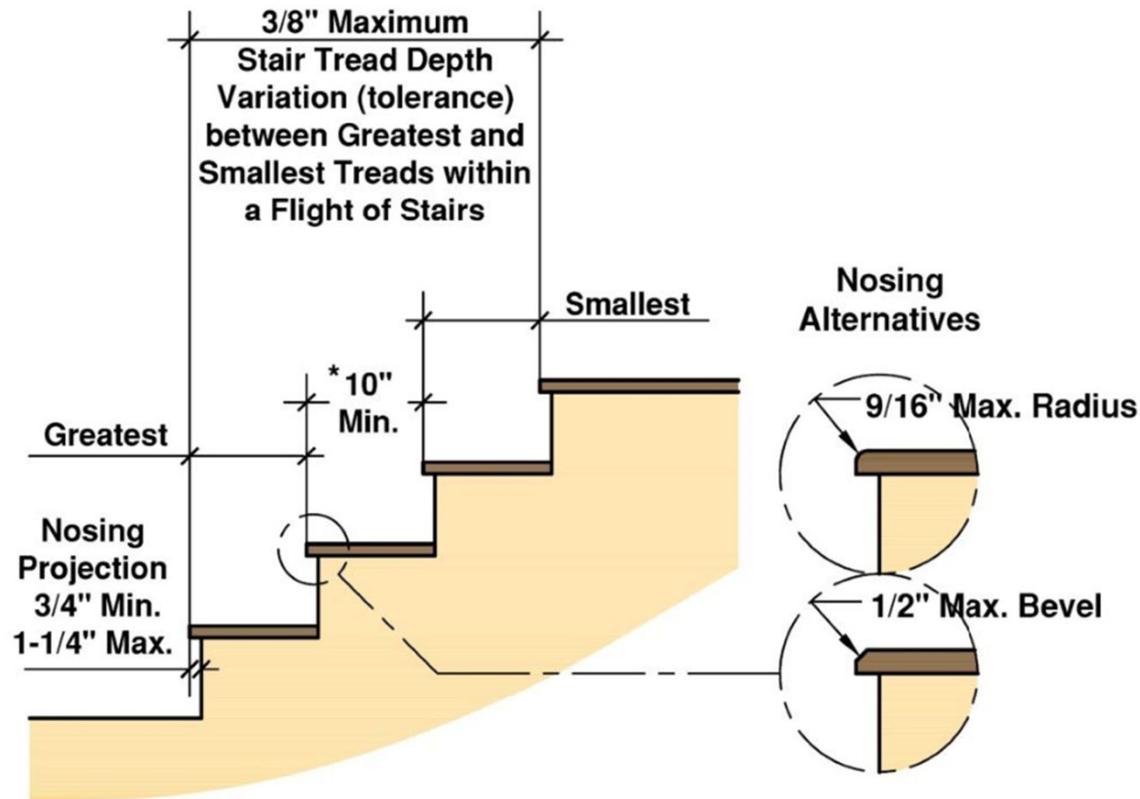


\* Nosing is required where tread depth is minimum 10".  
Exception: Nosing not required if tread depth is 11" minimum.


# Building Standards

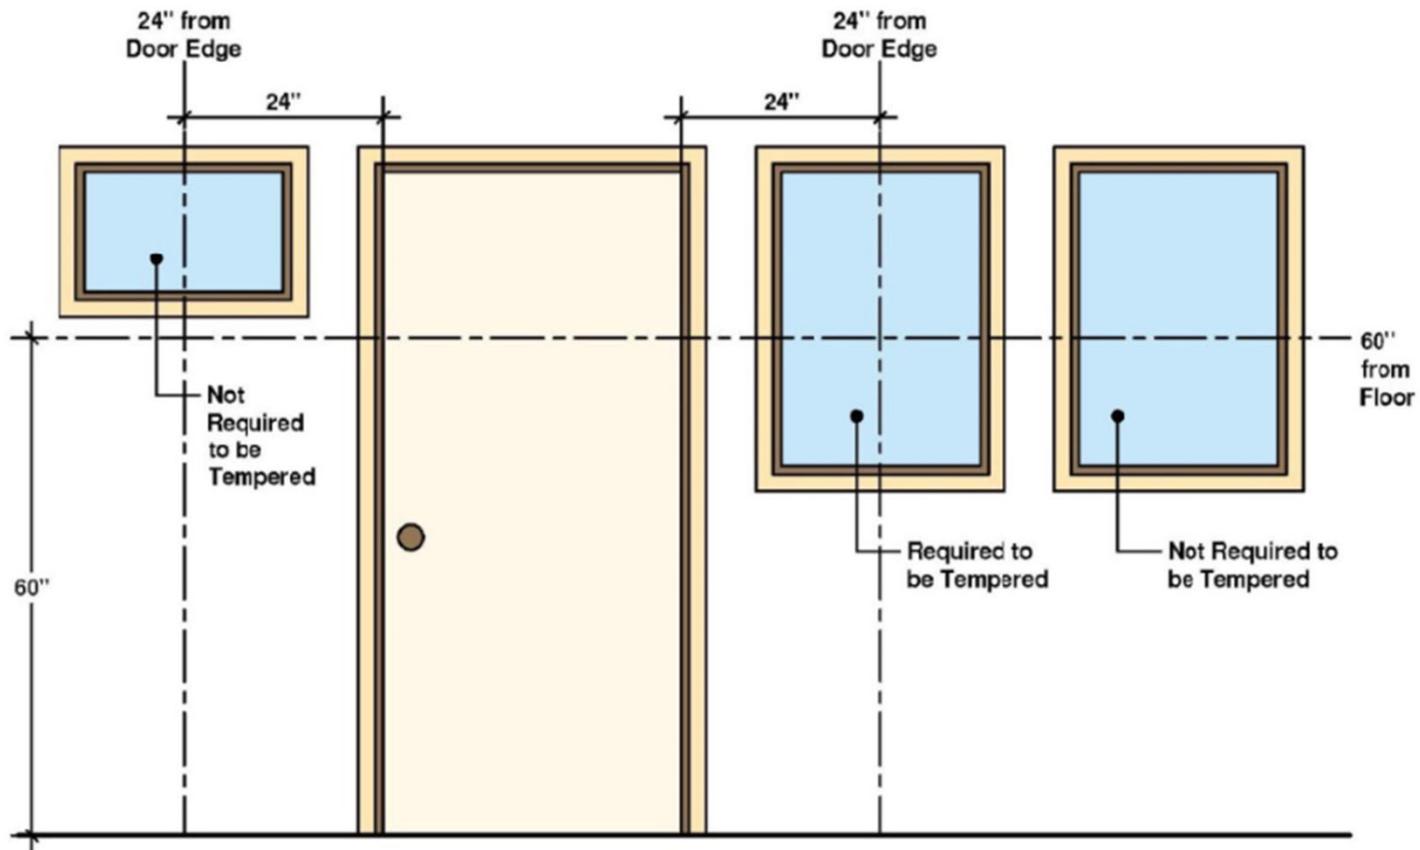


# Building Standards

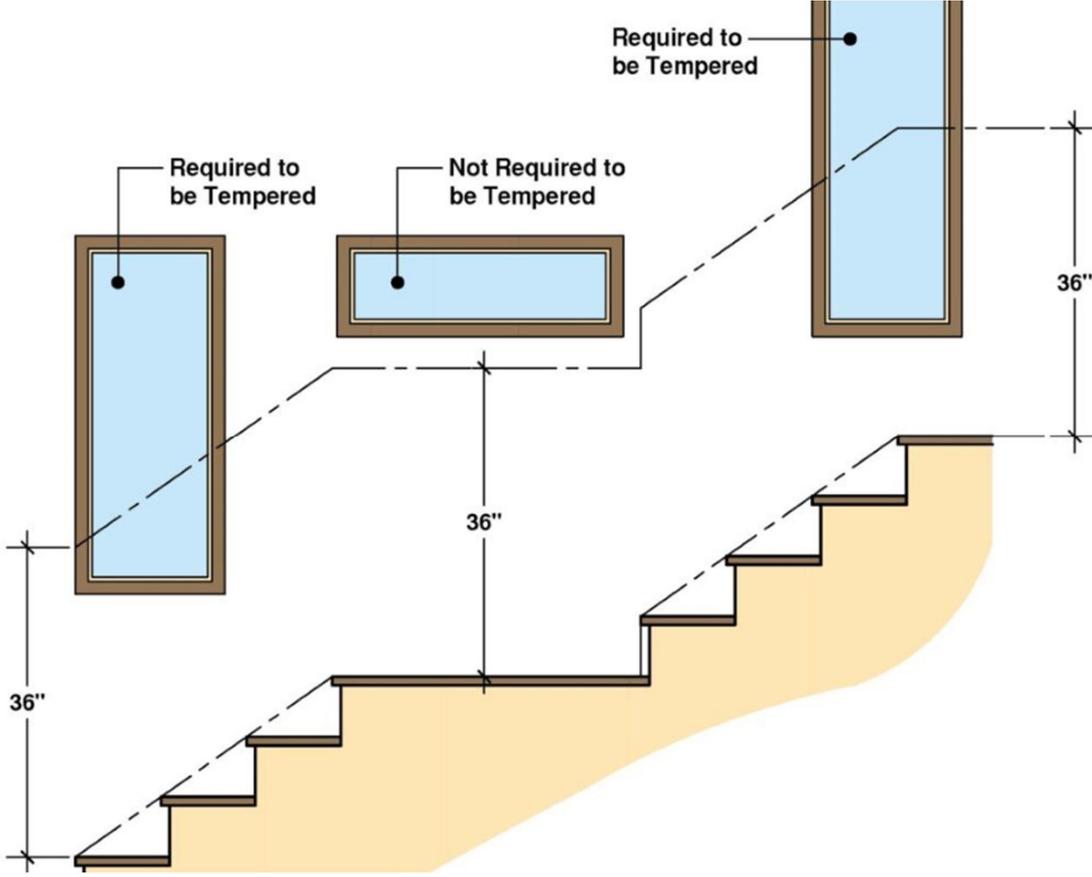


# Building Standards

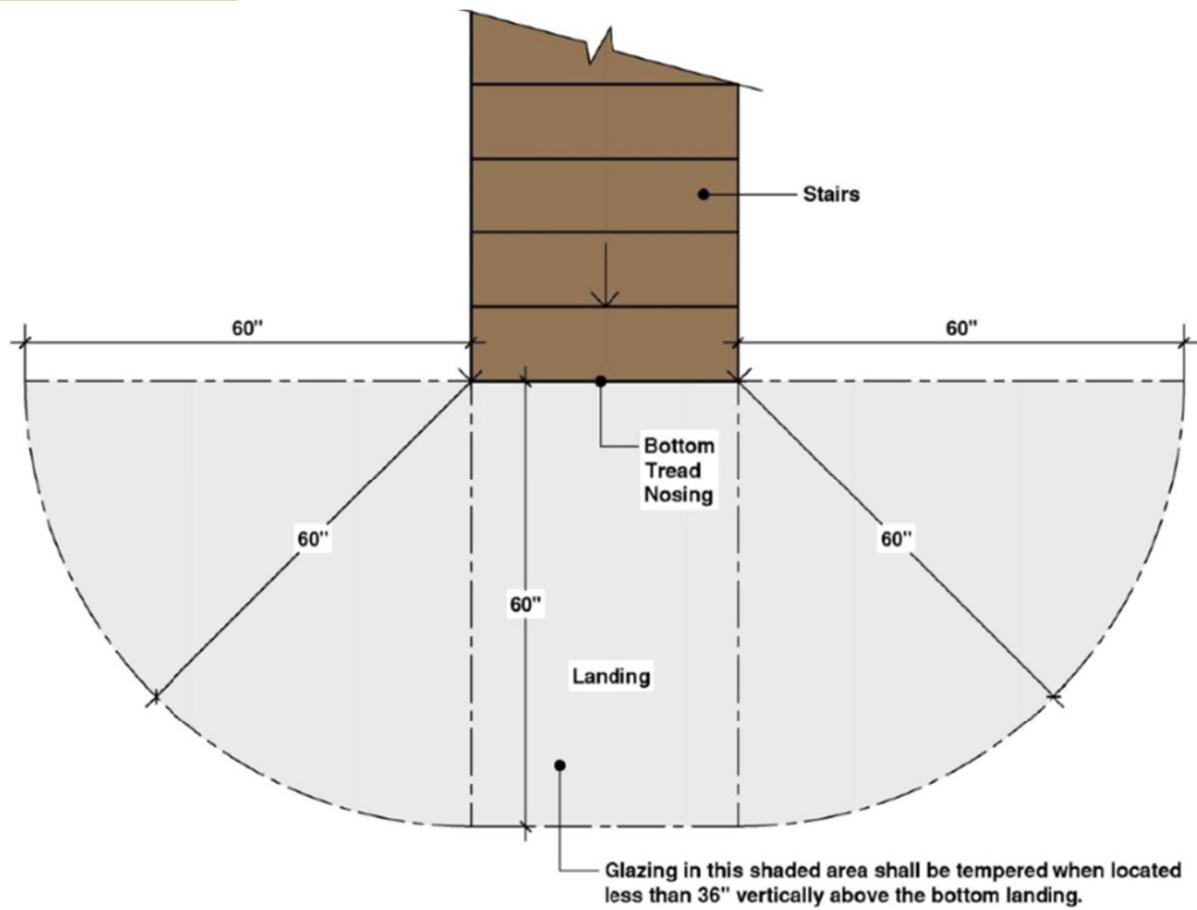

# Building Standards

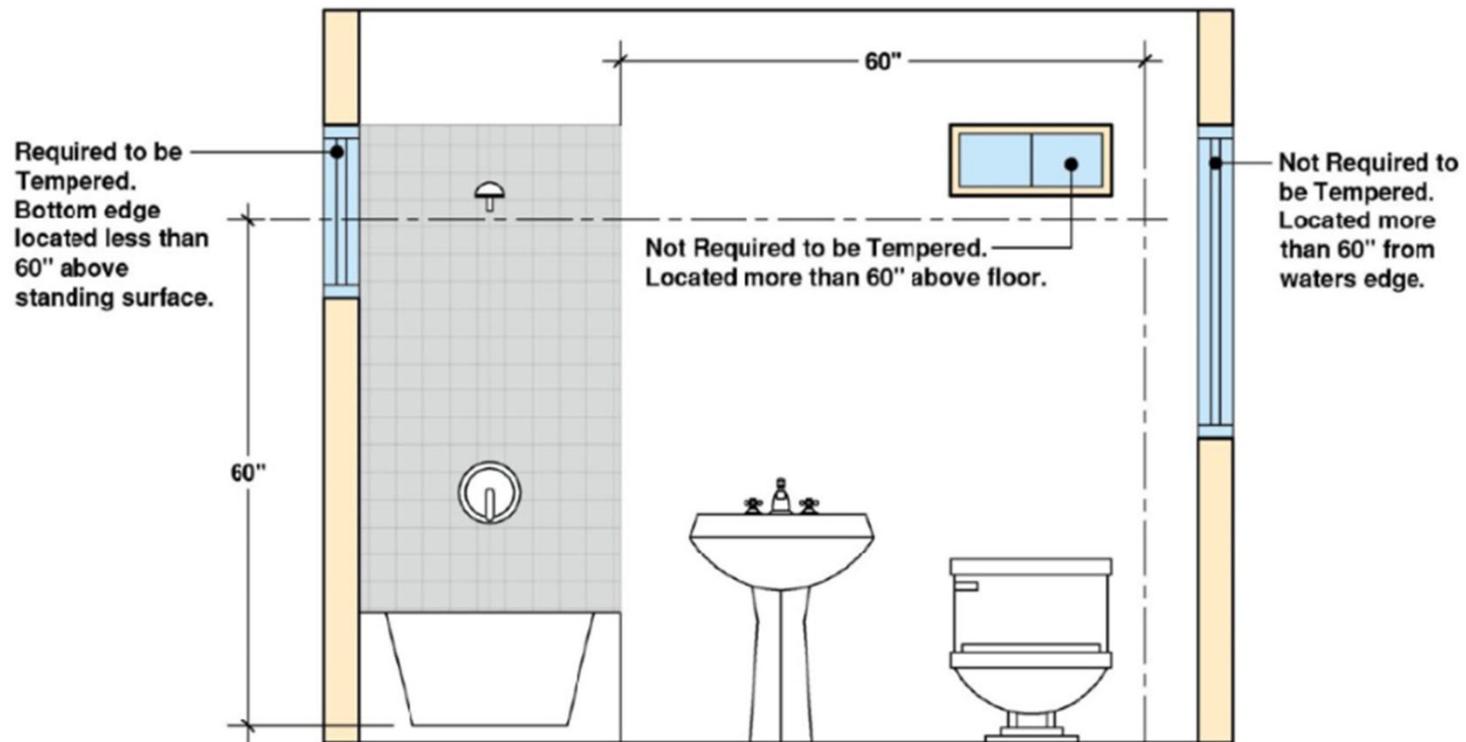

# Building Standards

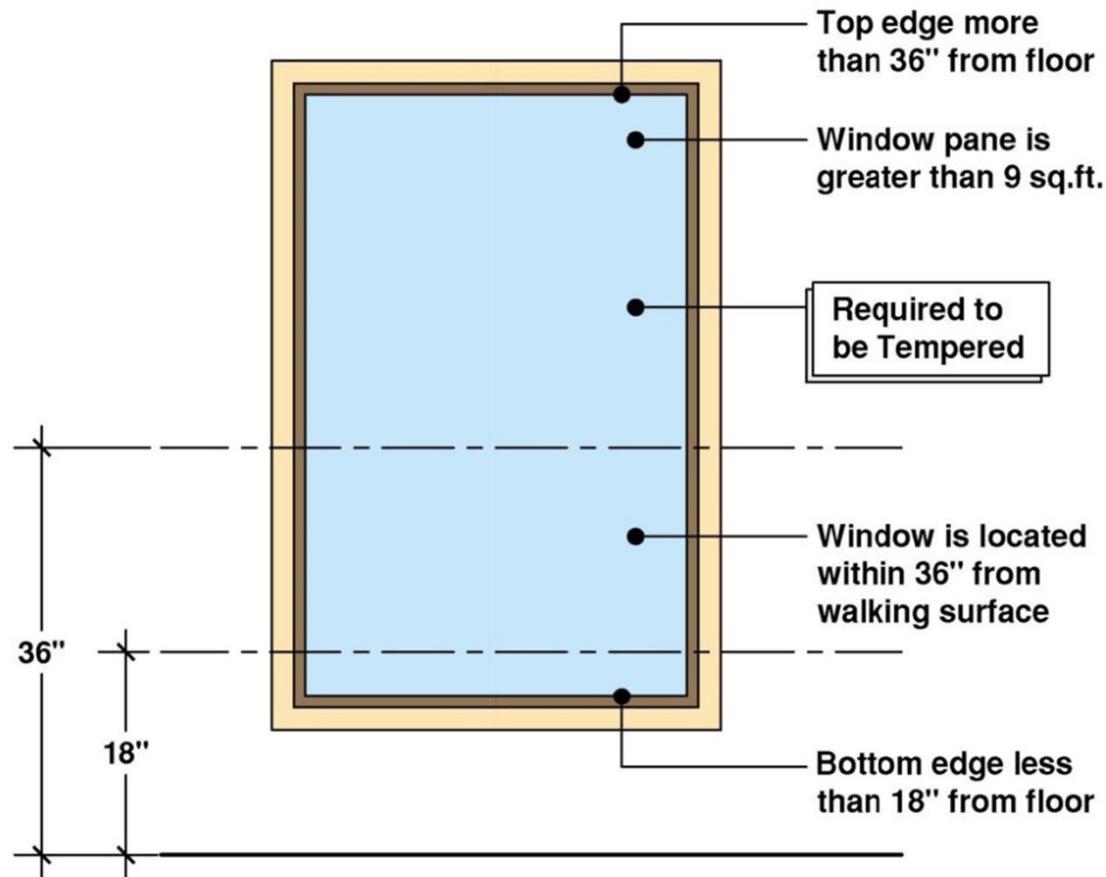

# Building Standards

